
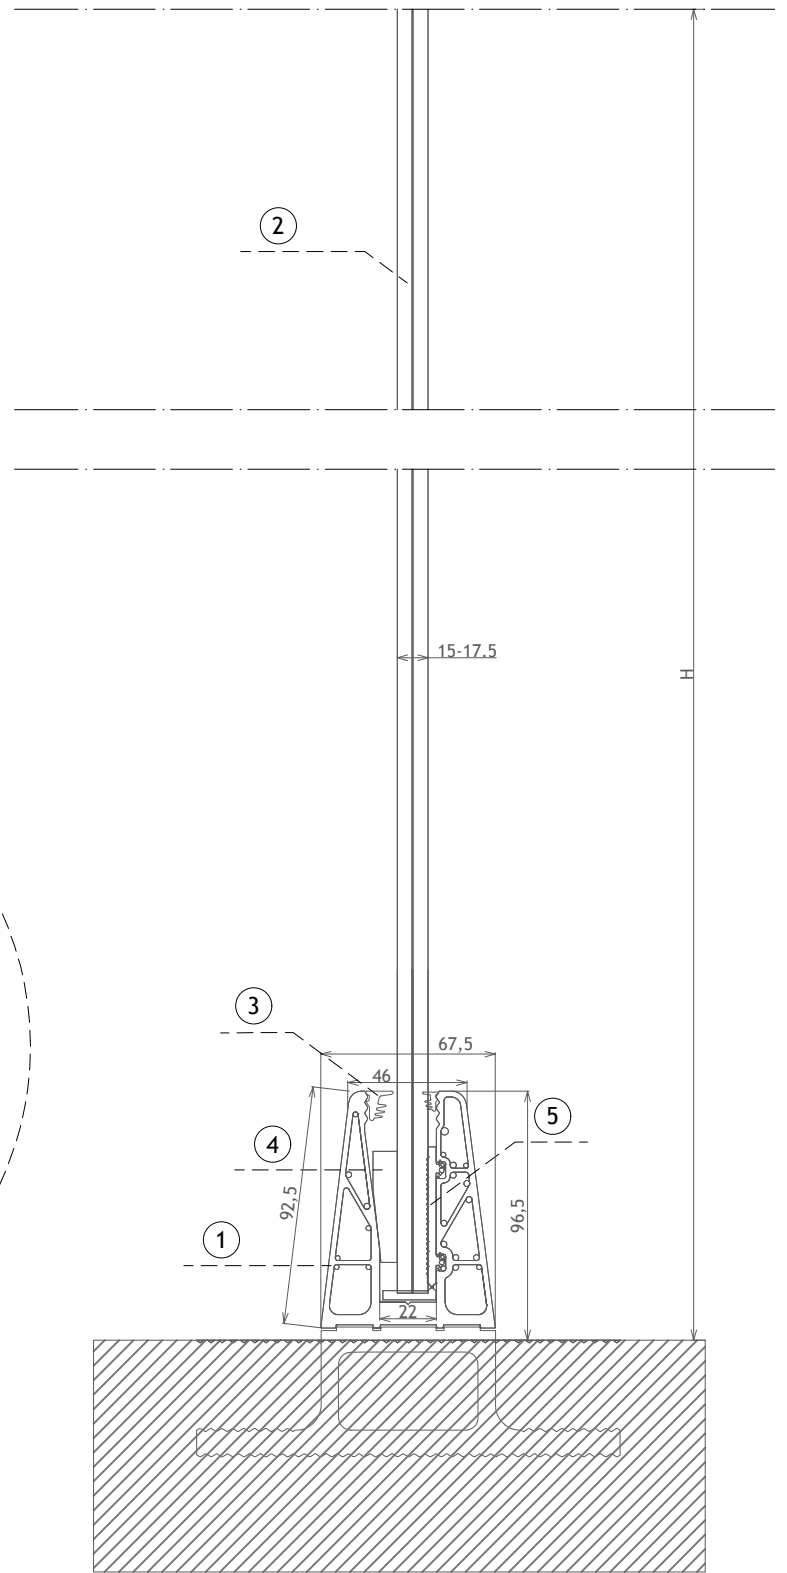




OPTION 1

- ① B3 Anodized Aluminium profile track
- ② Toughened laminated glass from 15 to 17,5 mm
- ③ Rubber gasket
- ④ Plastic packers
- ⑤ Glass fastener

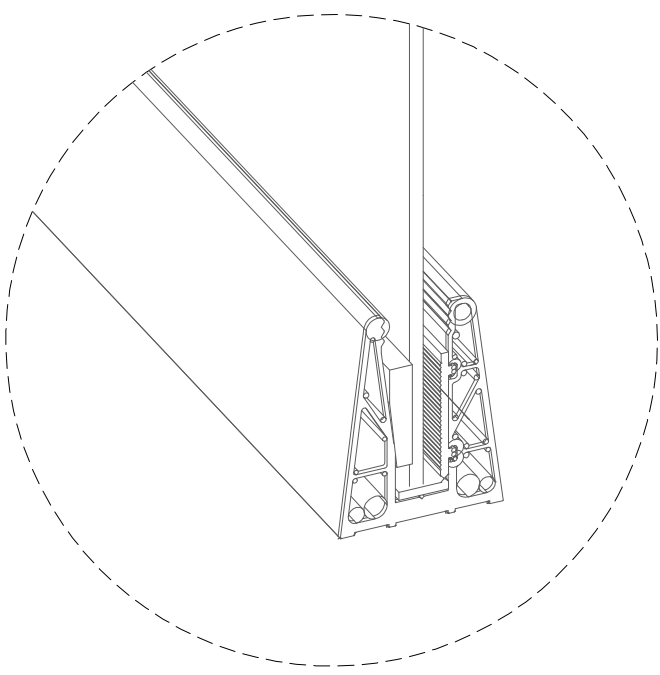



OPTION 2

- ① B3 Anodized Aluminium profile track
- ② Toughened laminated glass from 15 to 17,5 mm
- ③ Rubber gasket
- ④ Plastic packers
- ⑤ Glass fastener

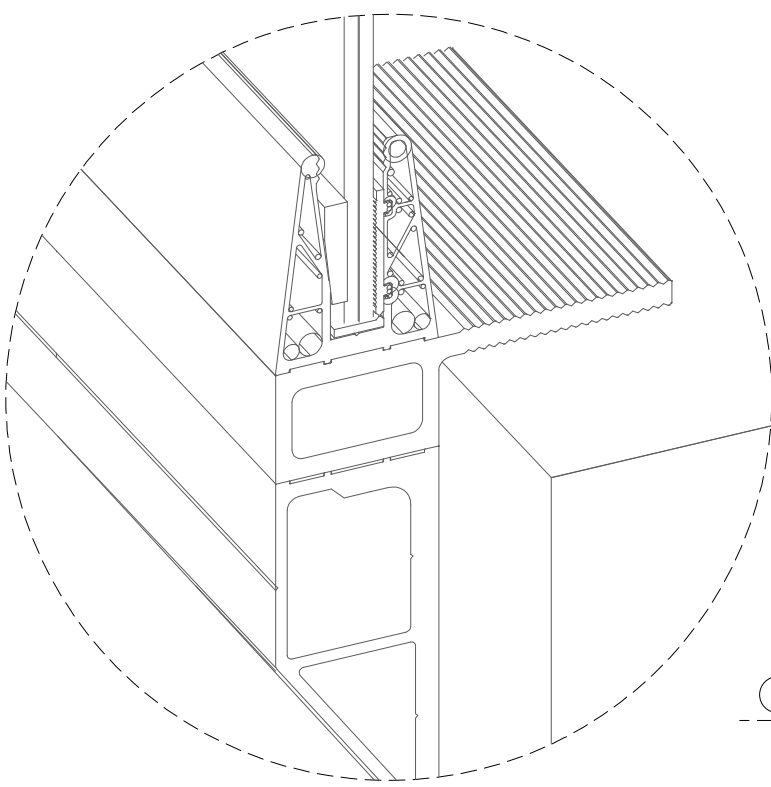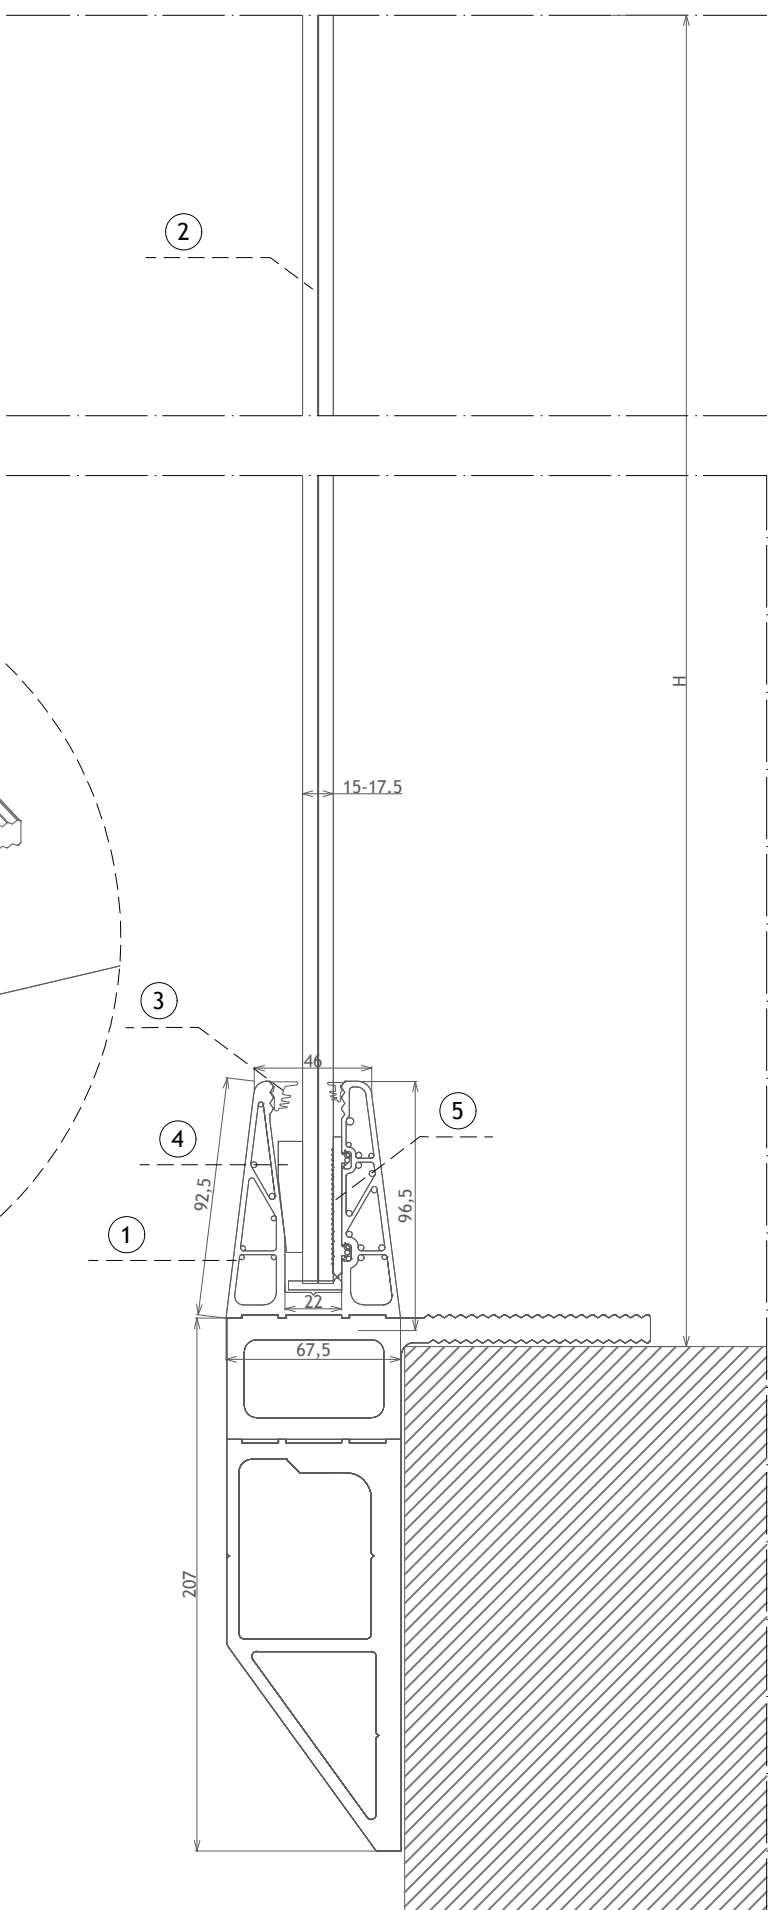

OPTION 3

- ① B3 Anodized Aluminium profile track
- ② Toughened laminated glass from 15 to 17,5 mm
- ③ Rubber gasket
- ④ Plastic packers
- ⑤ Glass fastener

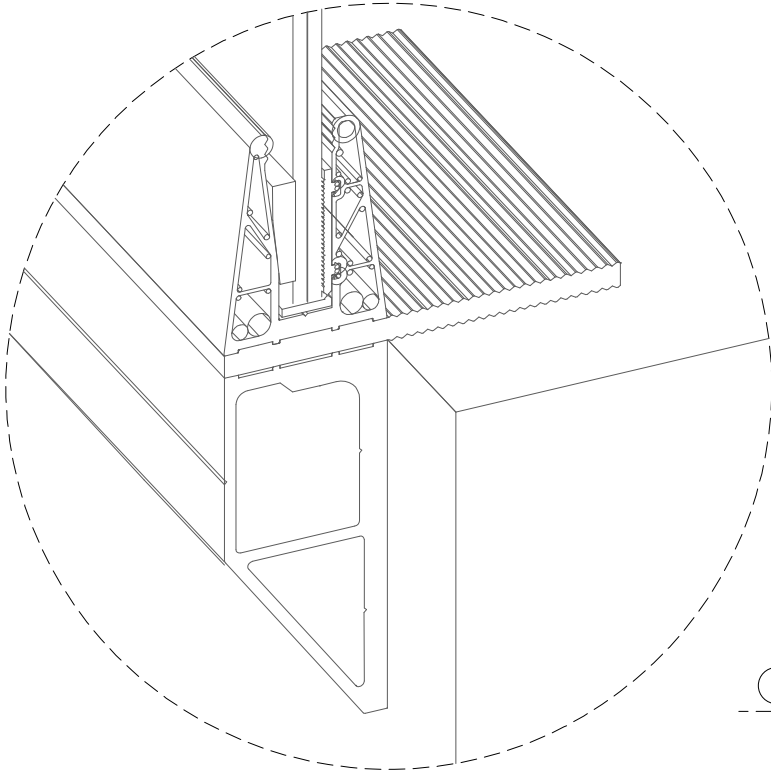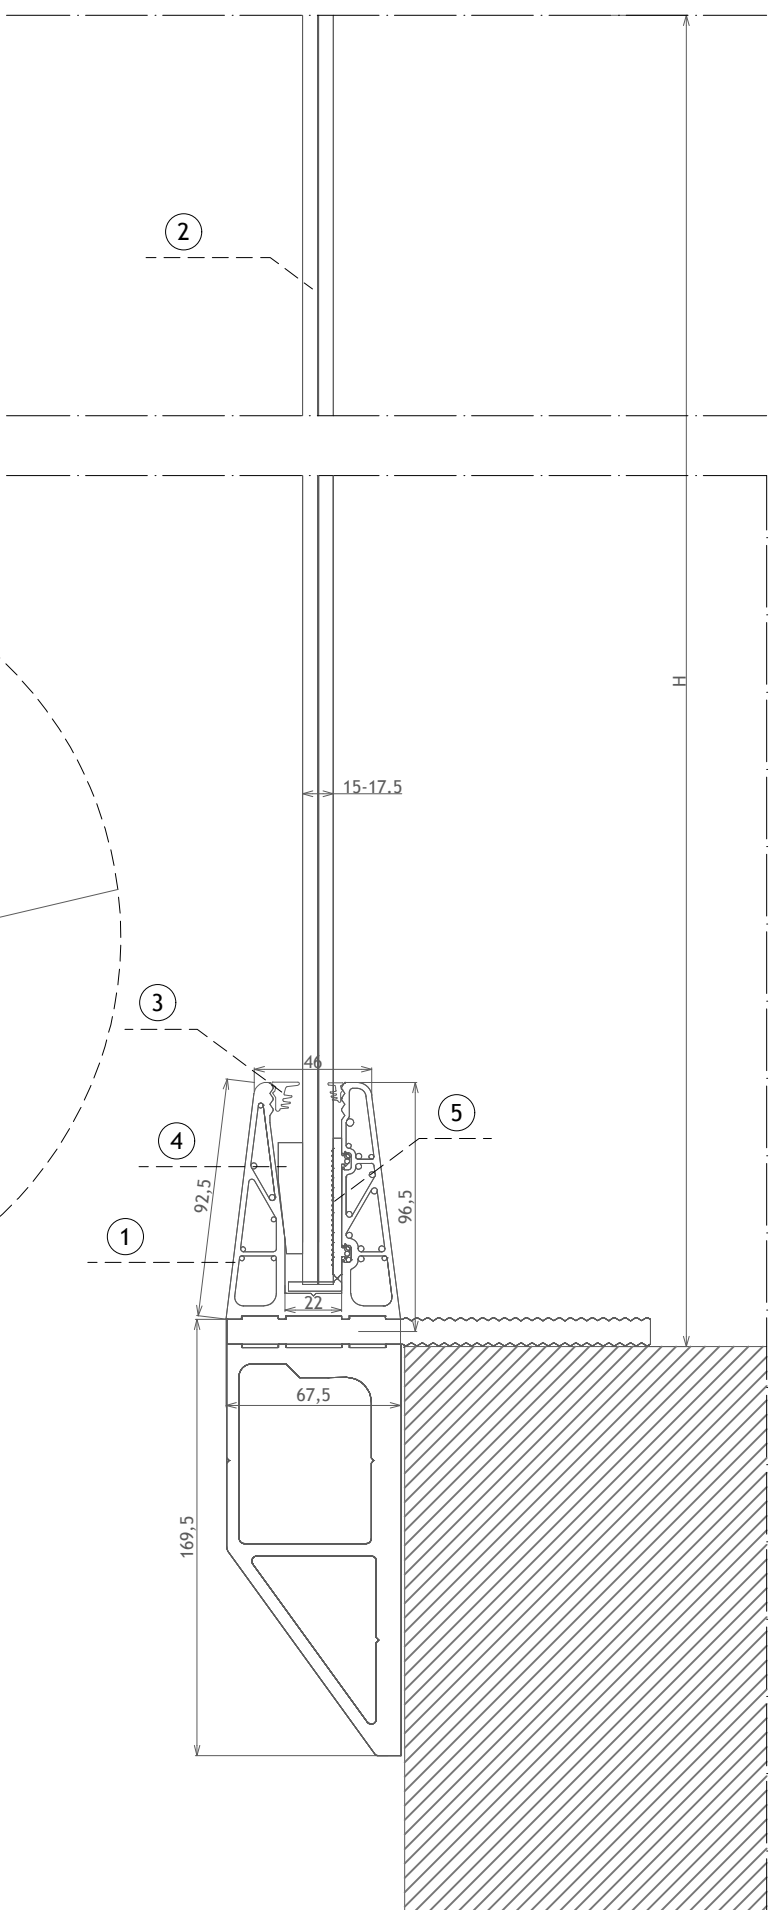

OPTION 4

OPTION 4

- ① B3 Anodized Aluminium profile track
- ② Toughened laminated glass from 15 to 17,5 mm
- ③ Rubber gasket
- ④ Plastic packers
- ⑤ Glass fastener

